

US Army Corps of Engineers MOBILE DISTRICT



Borrow Sites Being Considered






US Army Corps of Engineers MOBILE DISTRICT



Recommended Placements for Restoration of Sediment Budget – Mississippi Barrier Islands

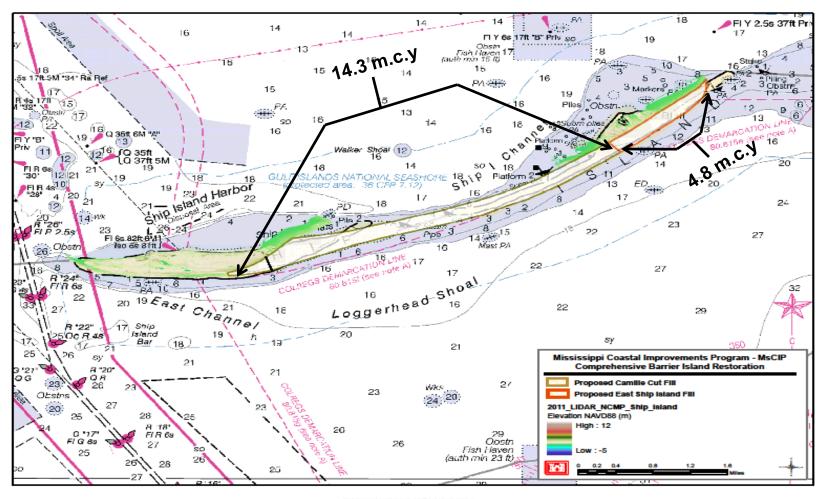



US Army Corps of Engineers MOBILE DISTRICT



Recommended Plan – Phases of Construction

- Construction Phases
 - Phase 1 (6.1 m.c.y.)
 - Initial closure of Camille Cut
 - Top of Berm = EL. +5 ft NAVD88
 - Crest Width = 500 ft
 - Phase 2 (4.8 m.c.y.)
 - East Ship Island
 - Top of Berm = EL. +6 ft NAVD88
 - Crest Width = 1,100 ft
 - Phase 3 (7.2 m.c.y.)
 - Widen and raise Camille Cut Fill
 - Top of Berm = EL. +7 ft NAVD88
 - Crest Width = 1,000 ft
 - Phase 4 (1 m.c.y)
 - Cap Camille Cut Fill
 - Finer grained sand

