


# U.S. ARMY CORPS OF ENGINEERS NEW YORK DISTRICT

## FY2018 DREDGING PROGRAM

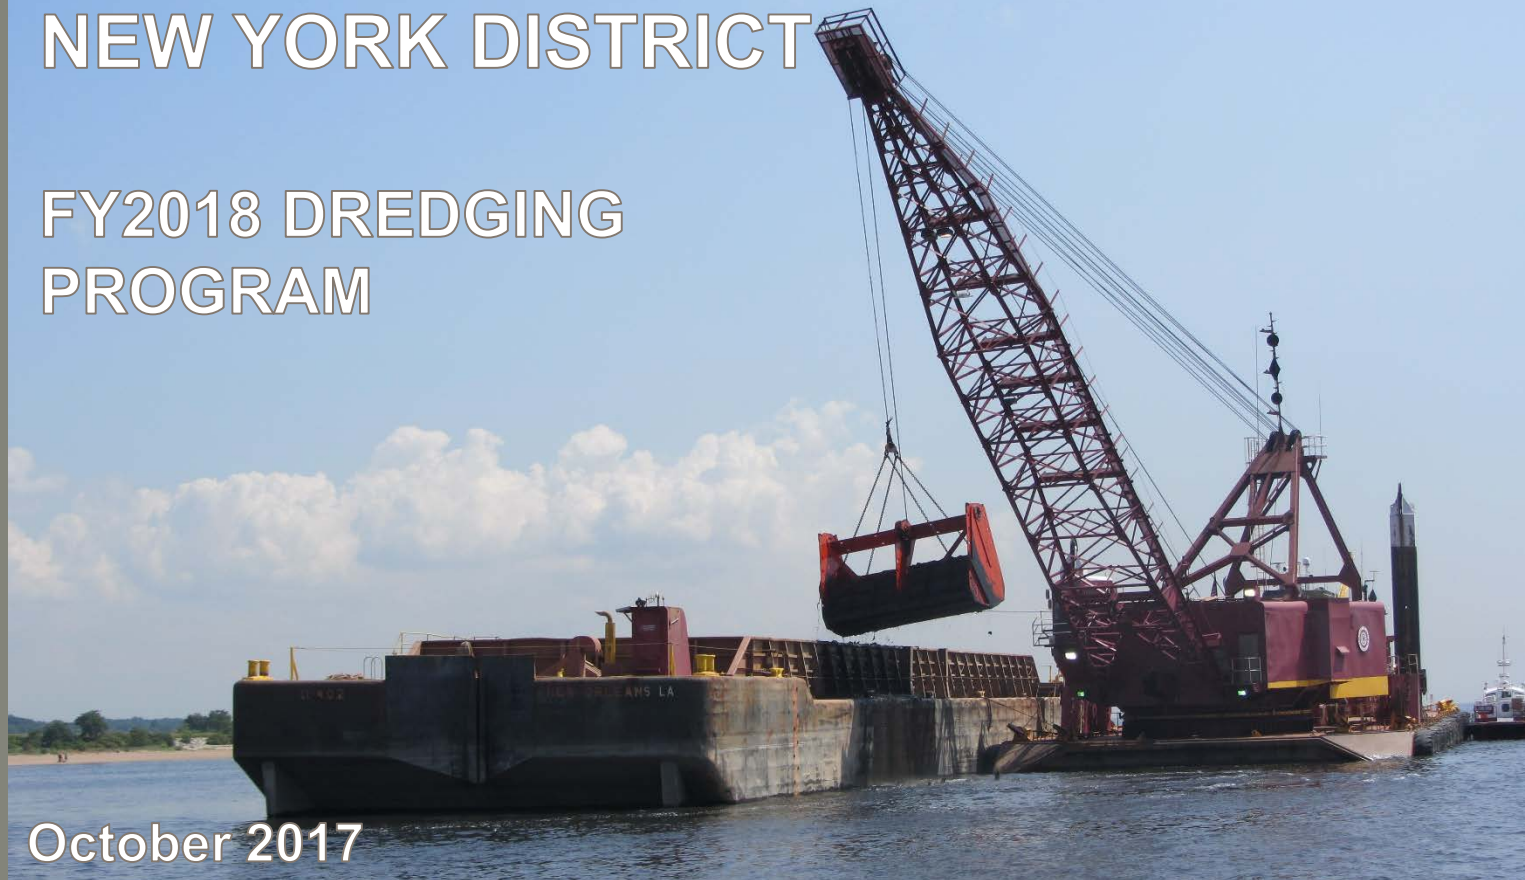

October 2017

New York & New Jersey Channels Federal Navigation Project



**US Army Corps  
of Engineers**



# OVERVIEW

- ❖ FY18 NAN Dredging Program
- ❖ Detailed Project Slides




**US Army Corps  
of Engineers**



# FY18 Dredging Program

Project	Dredge Type	Quantity (CY)	Placement Site	Advertise	Bid Opening	Award	SB Set -Aside (Y/N)	Env. No-Work Windows	2017			2018								
									OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
Maintenance Dredging																				
Hudson River, NY – Castleton, Stockport, & Hudson Reaches	Hopper	200,000	Upland	01-Jun-18	02-Jul-18	23-Jul-18	N	31 Dec – 31 Aug												
Newark Bay 40/50ft, NJ	Mechanical	480,000	Upland	12-Feb-18	15-Mar-18	15-May-18	N	01 Mar – 31 May												
NY Harbor, Sandy Hook Channel	Mechanical	200,000	Ocean	01-Jun-18	02-Jul-18	20-Jul-18	N	15 Nov – 15 Sep												
Hurricane Sandy Shore Protection Projects																				
Fire Island – Montauk Point, NY Contract #3B2 (Fire Island Communities)	Hopper	2,500,000	Shoreline	15-Jan-18	01-Mar-18	21-Mar-18	N	None												
Long Beach, NY – Contract #2	Hopper	4,800,000	Shoreline	05-Nov-17	20-Dec-17	09-Jan-18	N	01 Apr – 31 Aug												
Union Beach, NJ Contract #1	Hopper	700,000	Shoreline	01-Feb-18	18-Mar-18	07-Apr-18	N	None												

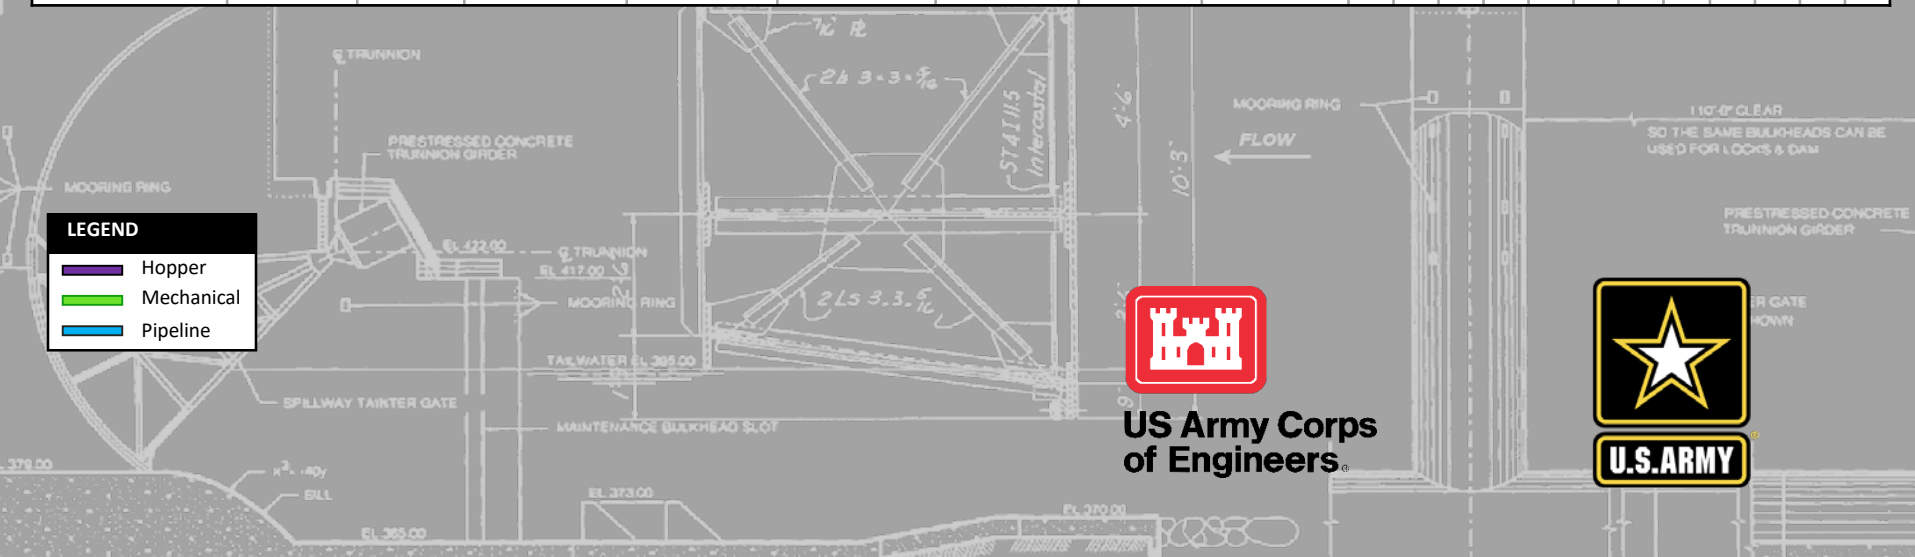



**US Army Corps of Engineers**





# HUDSON RIVER – CASTLETON, STOCKPORT, & HUDSON REACHES, NY

Scope of Work	O&M Dredging
Quantity:	200,000 CY
Material Type:	Silt, Clay, Sand
Placement Areas:	Houghtaling Island
Equipment:	Hopper
Environmental Windows:	31 December – 31 August
Advertisement Date:	June 2018
Bid Opening Date:	July 2018
Start Date: (NTP)	September 2018
Issues:	None

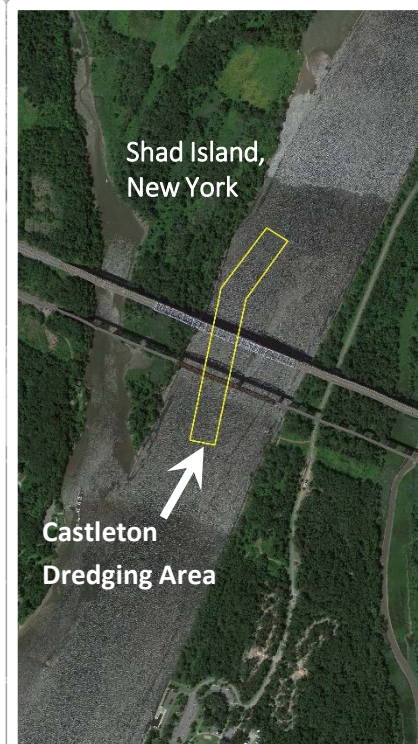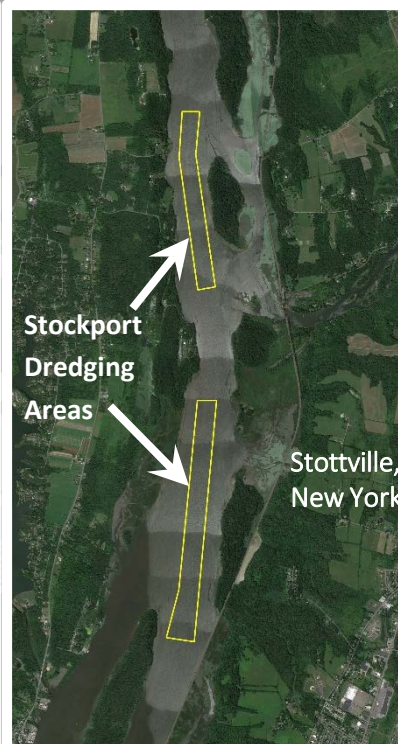

**US Army Corps  
of Engineers**





# NEWARK BAY 40/50 FT, NEW JERSEY



Scope of Work	O&M Dredging
Quantity:	480,000 CY
Material Type:	Silt and Clay
Placement Areas:	Upland
Equipment:	Mechanical
Environmental Windows:	No Dredging 01 March – 31 May
Advertisement Date:	February 2018
Bid Opening Date:	March 2018
Start Date: (NTP)	June 2018
Issues:	None



**US Army Corps  
of Engineers**



# NY HARBOR - SANDY HOOK CHANNEL

Staten Island



Area to be  
Dredged



New Jersey

Approximate  
Placement Site

Scope of Work	O&M Dredging
Quantity:	200,000 CY
Material Type:	Sand
Placement Areas:	Ocean
Equipment:	Mechanical
Environmental Windows:	15 November – 15 September
Advertisement Date:	June 2018
Bid Opening Date:	July 2018
Start Date: (NTP)	September 2018
Issues:	None



US Army Corps  
of Engineers





# FIRE ISLAND INLET TO MONTAUK POINT, NY

## FIRE ISLAND COMMUNITIES CONTRACT #3B2

Scope of Work	Coastal Storm Risk Management
Quantity:	2,500,000 CY
Material Type:	Sand
Placement Areas:	Ocean Bay Park to Davis Park
Equipment:	Hopper
Environmental Windows:	None
Advertisement Date:	January 2018
Bid Opening Date:	March 2018
Start Date: (NTP)	April 2018
Issues:	Real Estate Acquisition Challenges



**US Army Corps  
of Engineers**



# LONG BEACH, NY CONTRACT #2

Scope of Work	Coastal Storm Risk Management
Quantity:	4,800,000 CY
Material Type:	Sand
Placement Areas:	Long Beach to Pt. Lookout
Equipment:	Hopper
Environmental Windows:	No Dredging 01 April – 31 August
Advertisement	November 2017
Bid Opening:	December 2017
Start Date: (NTP)	March 2018
Issues:	None




**US Army Corps  
of Engineers**





# UNION BEACH, NJ CONTRACT #1

Scope of Work	Coastal Storm Risk Management
Quantity:	700,000 CY
Material Type:	Sand
Placement Areas:	Union Beach, NJ (Raritan Bay)
Equipment:	Hopper
Environmental Windows:	None
Advertisement Date:	February 2018
Bid Opening Date:	March 2018
Start Date: (NTP)	May 2018
Issues:	Distance from Borrow Area to Placement Site

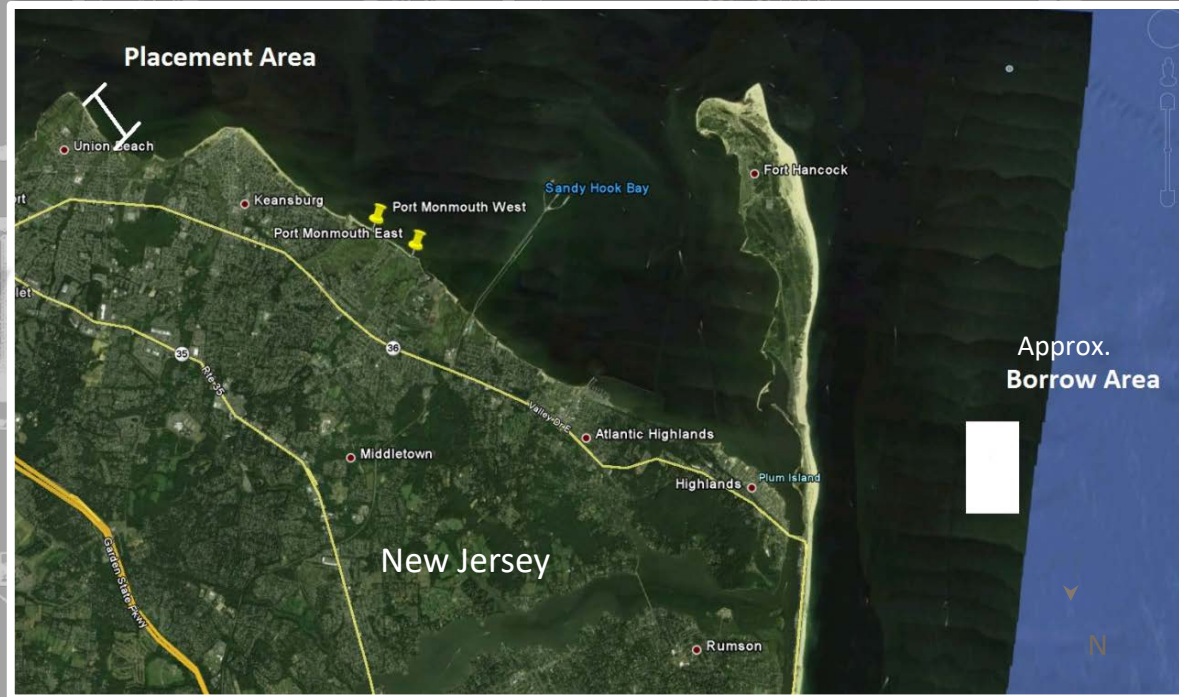

**US Army Corps  
of Engineers**



# Any Questions?

Gerlyn T. Perlas  
Chief, Technical Support Section  
US Army Corps Of Engineers, New York  
26 Federal Plaza  
New York, NY 10278  
(917) 790-8414  
[gerlyn.t.perlas@usace.army.mil](mailto:gerlyn.t.perlas@usace.army.mil)



**US Army Corps  
of Engineers**

